NIKA

SALES & SERVICE · GUELPH, ONTARIO

AUTHORIZED DEALER

DUSTBANE® | Canadian cleaning solutions since 1908

32″ DUAL-DISC WALK-BEHIND AUTO-SCRUBBER

Hurricane 850

XTT Walk-Behind Scrubber

32″ path · Dual disc · Traction drive · 24 V


Dustbane code **19324-C-AGM** · Hurricane 850 XTT Complete AGM



Thirty-two inches of scrub path on a machine one person walks behind. Two counter-rotating 16-inch discs put real torque on the floor, and the 39-inch squeegee runs seven inches wider than the path — so it picks up what the deck throws on a turn.

- **Two discs beat one.** A pair of 16″ discs at 200 RPM covers a 32″ path and works ground-in soil harder than a single brush of the same width.
- **It dries behind itself.** A 39″ squeegee and 70″ of water lift from a 3-stage vacuum motor — walk-on dry, first pass.
- **Traction drive does the pushing.** Powered wheels at up to 4 km/h; the operator steers a loaded machine instead of shoving it.
- **Sized for the long run.** 105 litres of solution and a 4–5 hour battery — on a 32″ path that is most of a shift before anything needs filling.

32″	28 gal	4–5 hr	70 dB	382 lb
SCRUB PATH	SOLUTION TANK	RUN TIME	NOISE	WEIGHT
81.5 cm	105 L · 29 gal recovery	24 V · 4 × 6 V	3-stage vacuum	173 kg · no batteries

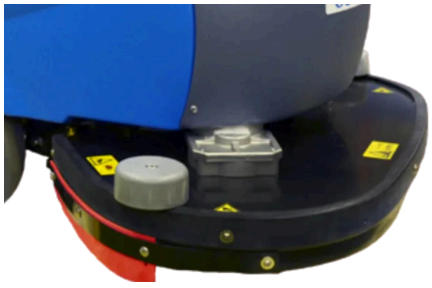

Dual 16″ disc deck
Two counter-rotating discs at 200 RPM, 500 W each, behind a full-width splash skirt.



39″ squeegee, 70″ lift
7″ wider than the scrub path, on castors, fed by a 3-stage 650 W vacuum motor.



10-year tank warranty
One-piece moulded polyethylene tanks — 105 L solution, 110 L recovery — warranted ten years.

WHERE IT EARNS ITS KEEP

Distribution centres
Long straight runs where a 32″ path turns a two-hour job into one.

Manufacturing
Production aisles and shipping floors with real soil load, not just dust.

Arenas & schools
Concourses, gyms and cafeterias between bookings and periods.

Big-box retail
Wide aisles overnight, with the tank capacity to finish without a refill.

Quotes, demos and same-week service.
Guelph-based. We sell it, we stock the parts, and we fix it.

(519) 824-0620 · (888) 250-8721
sales@nikasales.ca · nikasales.ca
40 Taggart St #5, Guelph, ON N1L 1M5 · Mon–Fri 8:30–5:00

 Specifications from Dustbane literature; subject to change without notice. Weight is quoted without batteries, as Dustbane publishes it. Productivity figures are either manufacturer ratings or clearly labelled estimates; actual coverage varies with soil load, floor layout and operator.

FACTORY SPECIFICATIONS

CLEANING	
Scrubbing width	**32 in** (81.5 cm)
Squeegee width	**39 in** (99 cm)
Brushes	**2 × 16 in** (2 × 41 cm) 2 × 16″ brush set 3SPPV02648
Brush / pad speed	**200 RPM**
Water lift at squeegee	**70 in** (178 cm)
Productivity	**41,170 ft²/h** (3,825 m²/h) theoretical at maximum speed
POWER & DRIVE	
Power supply	**24 V** (4 × 6 V)
Brush motors	**2 × 500 W**
Vacuum motor	**3-stage, 650 W**
Traction motor	**Yes**
Maximum speed	**4 km/h** (2.5 mph)
Run time	**4–5 hr**
TANKS, SIZE & NOISE	
Solution tank	**28 gal** (105 L)
Recovery tank	**29 gal** (110 L)
Machine size (L×W×H)	**65 × 35 × 42 in** (164 × 88 × 108 cm)
Weight	**382 lb** (173 kg) — without batteries
Noise level	**70 dB**
COMMERCIAL	
Approval	**cUL**
Order code	**19324-C-AGM**

SUPPLIED WITH

- Complete AGM battery set, 4 × 6 V (24 V)
- Charger
- Two 16″ pad drivers / brushes
- 39″ squeegee assembly
- One-piece polyethylene solution and recovery tanks

What it really covers

Dustbane rates the 850 XTT at **41,170 ft²/h theoretical at maximum speed**. **Our working estimate is 15,300–21,000 ft²/h (1,420–1,950 m²/h)** — a 32″ path at a realistic 2.5–3.0 km/h with 70–80% coverage after turns, edges and refills. Estimate, not a manufacturer rating. Size the machine on this number.

Weigh it with the batteries in

Dustbane's 382 lb is the dry machine. Four 6 V AGM batteries add a substantial amount on top — ask us for the shipped weight before you plan a tailgate lift, a ramp or an upper-floor install.

Parts and service from Guelph

We stock pads, brushes and squeegee blades and we service what we sell. Warranty labour goes through an authorized Dustbane service centre — that's us.

WARRANTY — AS PUBLISHED BY DUSTBANE

10 yr
Polyethylene tanks against defects in material and workmanship.

3 yr
Major components — electrical, brush and vacuum motors, transmissions. Or 2,000 hours, whichever comes first.

1 yr
All other components, and labour through authorized Dustbane service centres.

1 yr
Batteries and chargers, pro-rated, with documented maintenance.

Excludes normal wear items, misuse, improper maintenance, unauthorized repairs, non-approved parts and freight. Full terms at dustbane.ca.

BEFORE YOU ORDER — FOUR THINGS WORTH CHECKING

Weight with batteries
The 382 lb figure excludes the battery set. Confirm the shipped weight before planning lifts, ramps or an elevator.

Aisle and door widths
65 × 35 in footprint, 42 in tall body. Measure the narrowest door and the tightest aisle turn on the route, not the widest.

Charging point
24 V on 4 × 6 V batteries. You need a dedicated outlet and floor space where the machine parks overnight.

Fill and dump
105 L in, 110 L out. A drain and hose bib near the route saves more time than any spec on this sheet.

Ready to see one run on your floor?
Book an on-site demo, or ask for a written quote the same day.

(519) 824-0620 · **(888) 250-8721**
sales@nikasales.ca · nikasales.ca
40 Taggart St #5, Guelph, ON N1L 1M5 · Mon–Fri 8:30–5:00

Specifications from Dustbane literature — product page dustbane.ca/products/hurricane-850-xtt and spec sheet “Hurricane_850XTT-en”, retrieved 28 September 2026. Solution tank shown as 28 gal (105 L) per Dustbane's 850 XTT spec sheet; Dustbane's web page prints 26 gal (100 L) for the same model — confirm at time of order. Water lift shown as 178 cm to agree with the published 70 in; Dustbane's spec sheet prints 170 cm, which does not convert. cUL as shown on Dustbane's 850 XTT product page; the printed spec sheet shows “Approval(s): N/A” — confirm before relying on it in a tender. Weight is published by Dustbane without batteries; the battery set is additional. Productivity figures marked as estimates are modelled, not manufacturer ratings, and vary with soil load, layout and operator. DUSTBANE® and Hurricane™ are trademarks of Dustbane Products Ltd. Specifications subject to change without notice.